

FLEXCUT


New

ATOMIC

Power your graphics with the energy of FlexCut Atomic!

100% POLYURETHANE FILM,
HIGH DURABILITY AND THE TRUSTED
FLEXCUT EASY CUTTING & WEEDING.

7 NEW
SPARKLY COLORS
FOR YOUR BRILLANT
DESIGNS

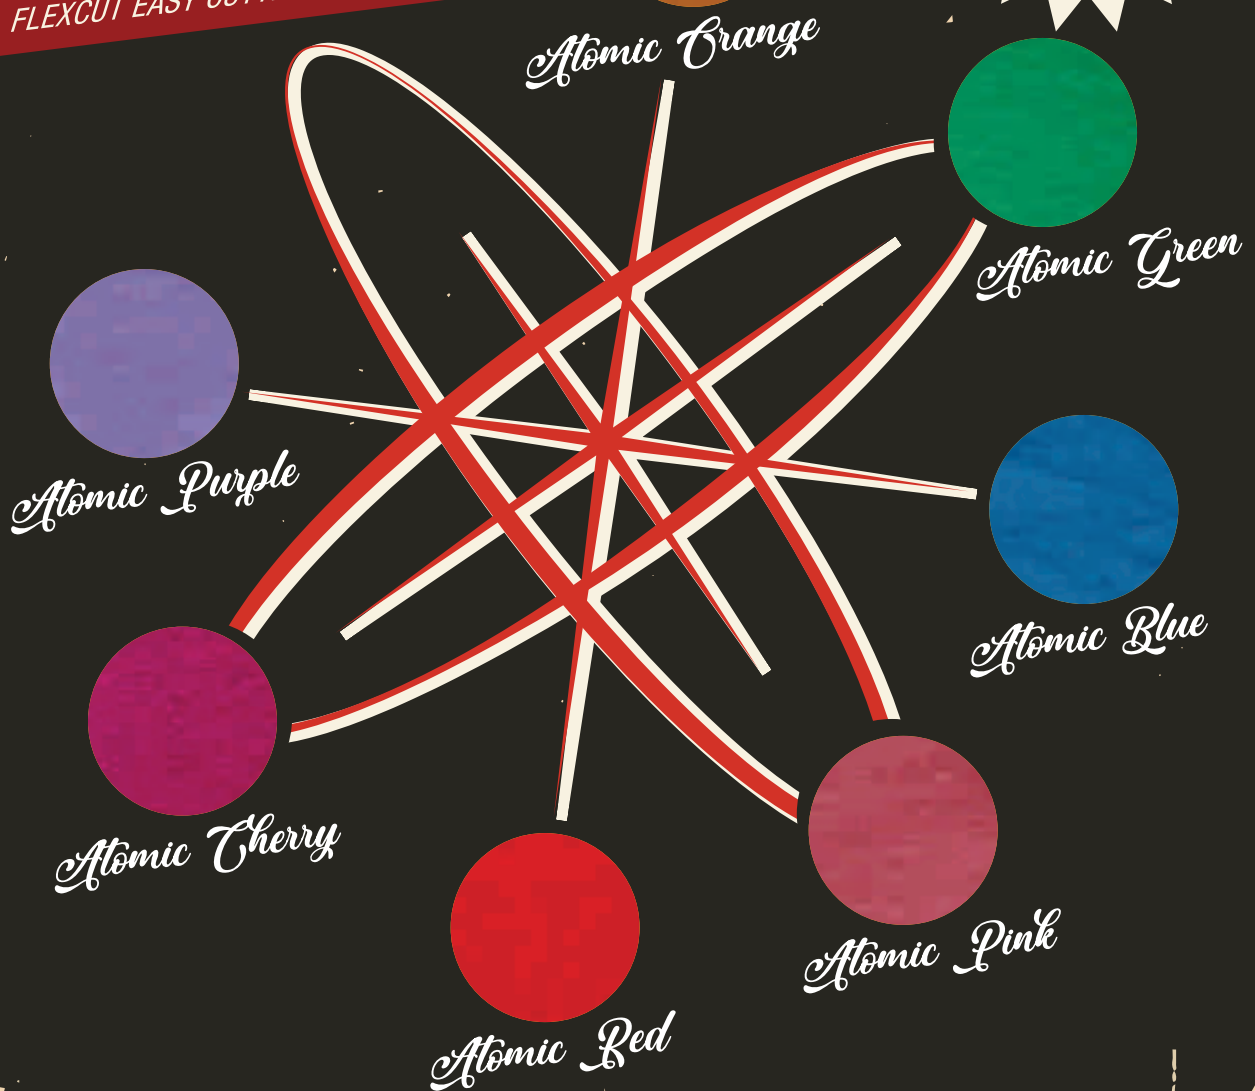

Manufacturing processes and related products are protected by existing patents :
FR 97 12921 ; EUR 98 402 542.9 ; US 6.224.707 ; FR 98 12862 ; EUR 99 402 398.4 ; US 6.249.297 ; FR 04 08625 ; FR 05 05379 ; FR 05 05380 ;
international extensions and new applications pending.

sef
TEXTILE

FLEXCUT *New* ATOMIC




1

Scan or create a digital vector image.



2

Cut a mirror-image of your design on a plotter-cutting machine.



3

Apply with an electric press.



FlexCut Atomic

Transfer Temperature	Transfer Time	Transfer Pressure
165°C (330°F)	17 seconds	Medium/High pressure

Cotton, Polyester, PolyCotton...

Hot peel

Washing : up to 60°C (140°F)

Thickness : 60 µ

PACKAGING



50 cm (19,7")



5 meters (5,45 yd)

50 cm (19,7")

10 meters (10,9 yd)

50 cm (19,7")

25 meters (27,3 yd)



110 Bd Denis-Papin - 53000 LAVAL - France

Tél : 33 (0) 2 43 53 36 48

Fax : 33 (0) 2 43 67 11 78

Email : contact@sef-france.com

www.seftextile.com



SEF AMERICAS

14476 Duval Place West / Ste.201

Jacksonville, FL32218 / 904-423-0211 - Phone / USA

sales@SEFamericas.com

www.sefamericas.com