




OUR PEOPLE | OUR PASSION | OUR PRODUCTS

Our passion for our products is at the core of everything we do

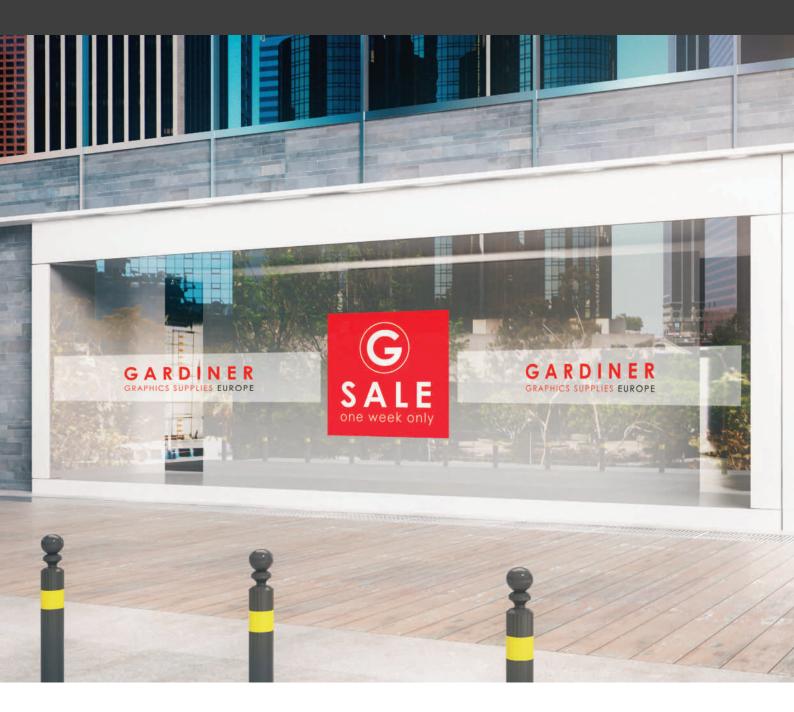

G-Cling

Static cling window film

Good looks that get people talking.

Perfect for:

- Promotional items (stickers, mouse pads)
- Banners & Point of Purchase promotions
- Seasonal decorations
- Children's games
- Caution labels



Printability to rival my competitors + prices they can't beat = product perfection

G-Cling Static cling window film



G-Cling Clear / G-Cling White

Film thickness

G-Cling Clear PET 180: 200mic (+/- 5) G-Cling White PP 230: 230mic (+/- 5)

Liner

G-Cling Clear PET 180: 50mic matt clear filmic G-Cling White PP 230: 50mic matt white filmic

Peel strength Circa 10g / 22mm

Available width 1370mm

Available length 50m

Printability

Unlike cheaper clings, which are only suitable for UV and Latex printing, G-Cling products deliver superior printing results via a large range of wide format printing technology such as Latex, UV, Solvent and Eco-solvent. For the finest results use OEM inks.

Apply film by carefully removing liner while smoothing out bubbles as you apply to substrate surface. Ask us for detailed application advice.



Better results - every time!

- Easy to apply no special expertise required.
- A cost-effective choice removable and reusable many times.
- 'Vacuum suction' technology (think octopus suckers!) means no glue = no sticky residue.
- If product is contaminated, it can easily be rejuvenated using sticky tape to clean and revive static properties.
- Easy to achieve, 'bubble free' smooth finish.
- PVC-free product.

Before use: To get the best results from your laminate, ensure the receiving surface is clean, dry and defect-free.

How to store: To prolong the product's usable life, avoid excessive exposure to UV radiation, store unused wall G-Cling in a dry place and do not expose to extreme temperatures (temp. 23° +/- 2° C, R.H. < 55%).

Shelf life: 2 years (in advised storage conditions).

Minimum expected 'in use' life: 1 year (indoors, in advised storage conditions).



CALL US: +44 (0) 23 92 22 11 33

EMAIL US: sales@ggsupplies.com

VISIT US: www.ggseurope.com



🖞 Call us to receive your Sample Pack

Need a custom product? Talk to our team. We can create the perfect product for you and your customers.