



Hanrun paper®

www.hanrunpaper.com

SUPER A-600 DTF PRINTER

2 EPSON i3200

CCD Camera

Touch Screen

*Make Printing
More Convenient*



Transfer to Digital Transfer to Future

Core Advantages



CCD Camera

The CCD function can automatically detect the current status of the nozzle, eliminating the need to manually detect the nozzle status. When the nozzle is disconnected, it is automatically cleaned to improve efficiency and further reduce the scrap rate.



Touch Screen

All functions can be realized on the two screens in front of you, such as electric paper pressing, ink shortage alarm, lighting, front guide heating, CCD, automatic moisturizing, etc., making the machine more intelligent.




Automatic Moisturizing

When the machine is not used for a long time after work or traveling far away, the automatic moisturizing function no longer requires the manual operation of squeezing in moisturizing liquid. Just click on automatic moisturizing on the machine, and the machine will automatically extract moisturizing liquid into the nozzle.




Tension Unwinding System

The design and adjustment of the tension unwinding system are crucial to the normal operation and printing results of the printer. Especially for applications such as high-speed printing and large-format printing, tension control is indispensable.

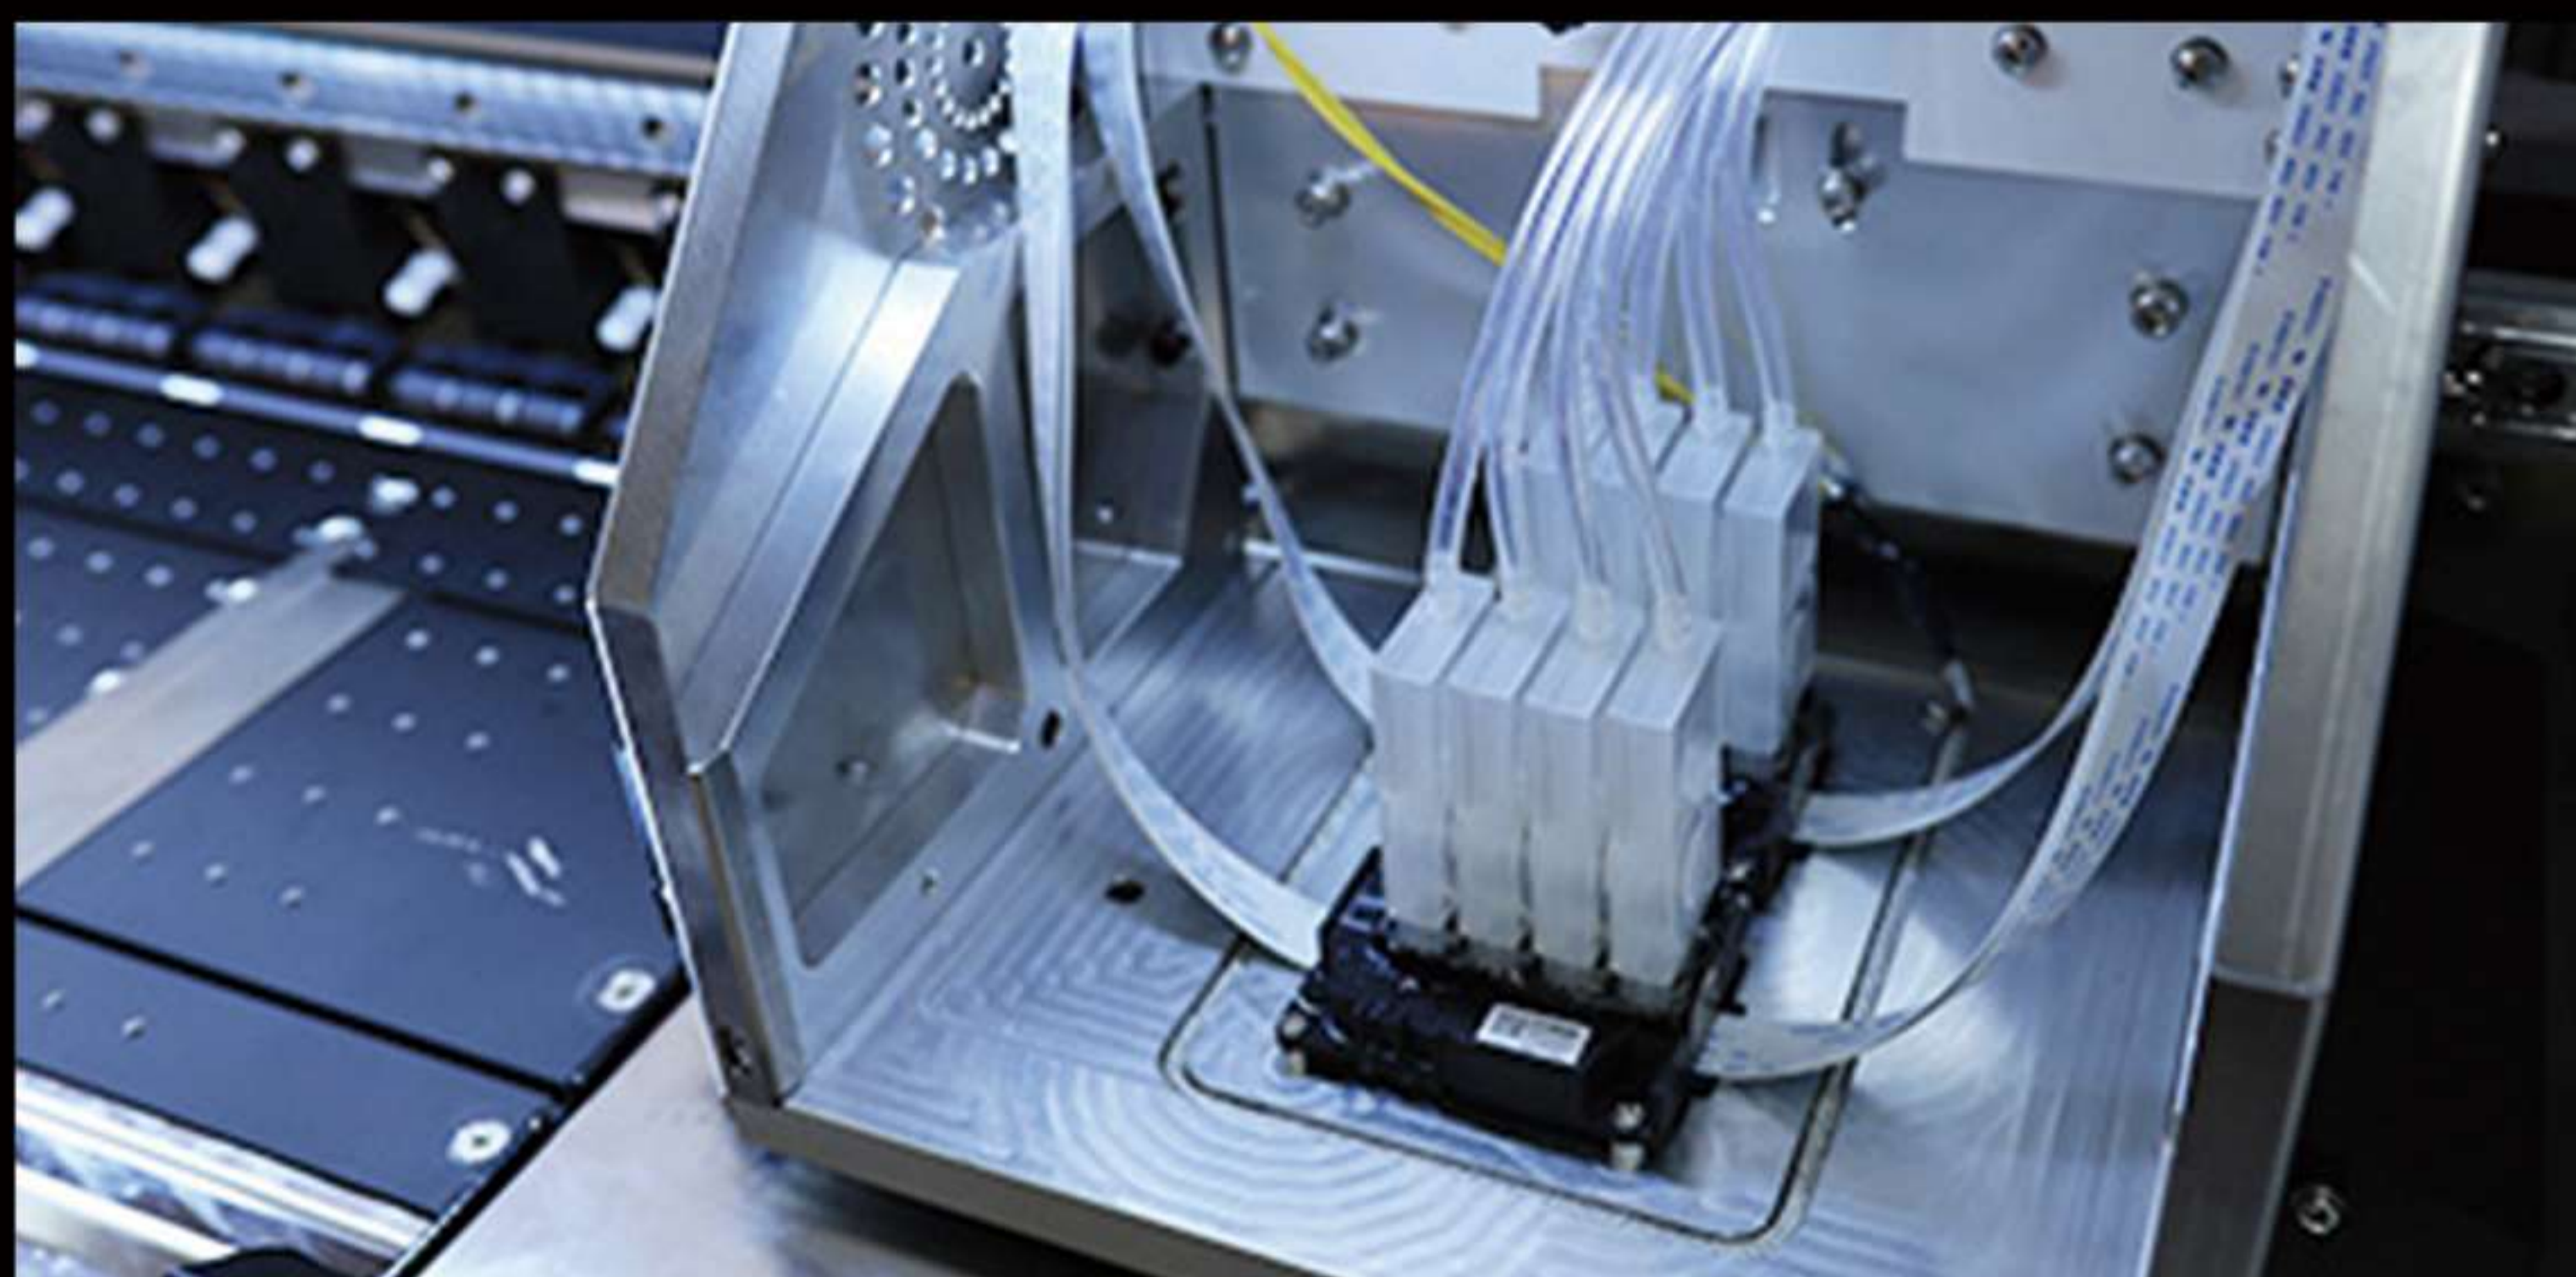


Installation Free

This machine does not require complicated installation operations and can be used directly after plugging in the power supply.

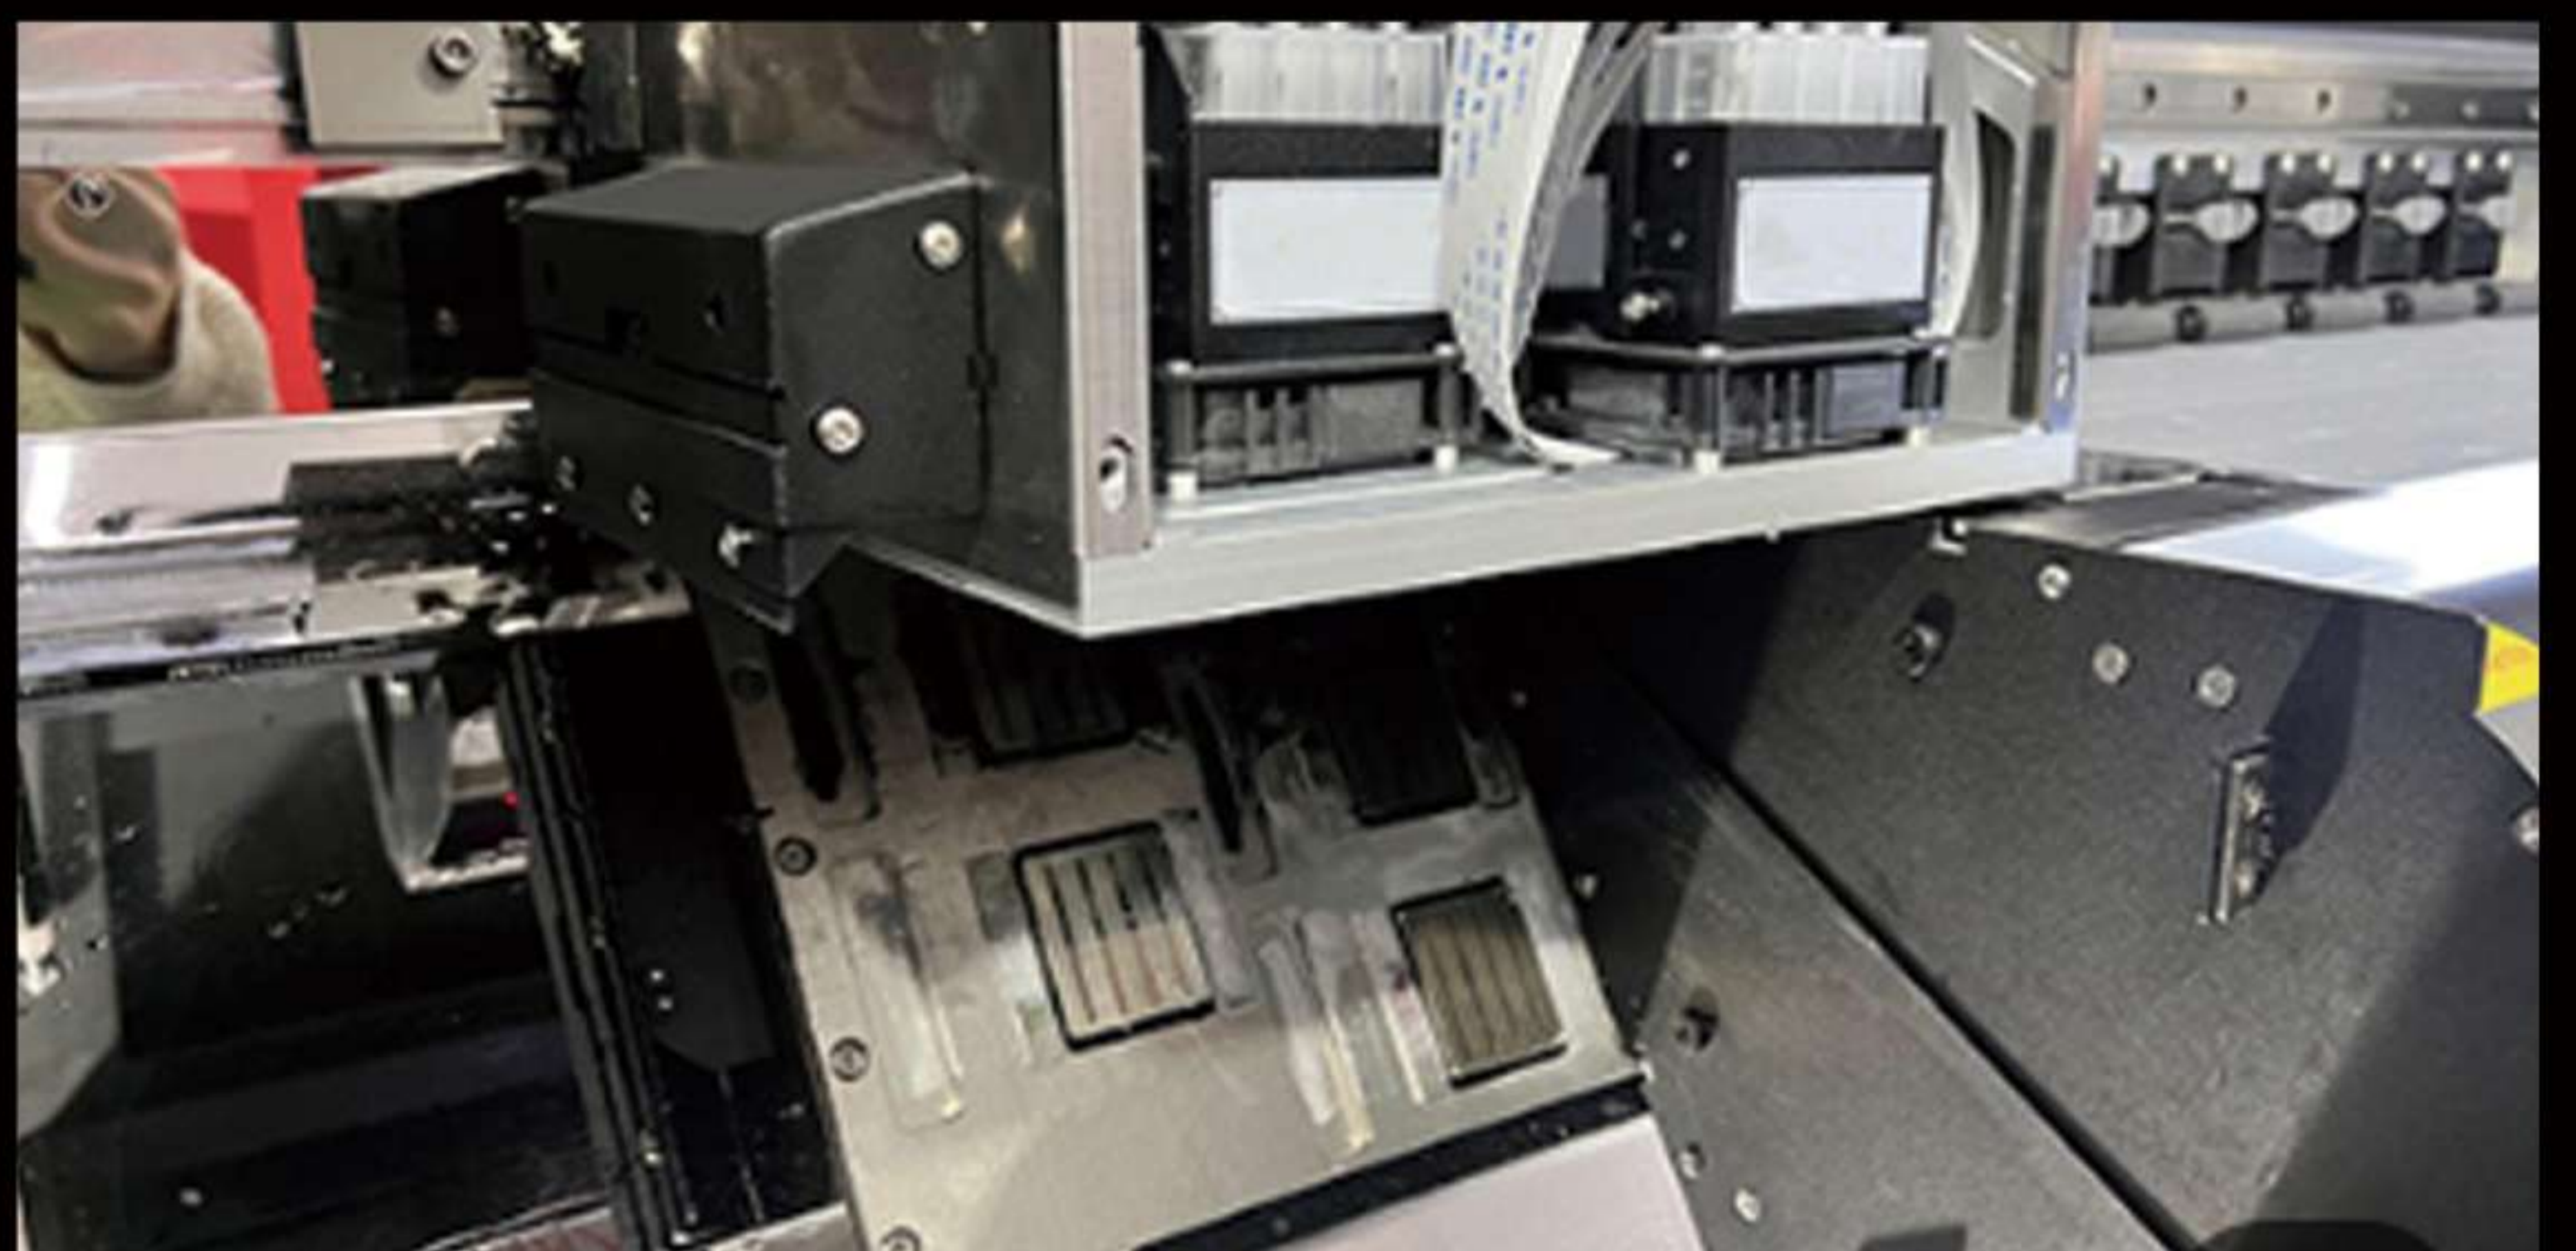

Mirror Inspection For Printhead

The mirror inspection area is designated to include angled mirror inspection zones, facilitating observation of nozzle conditions, as well as conducting cleaning and maintenance tasks.

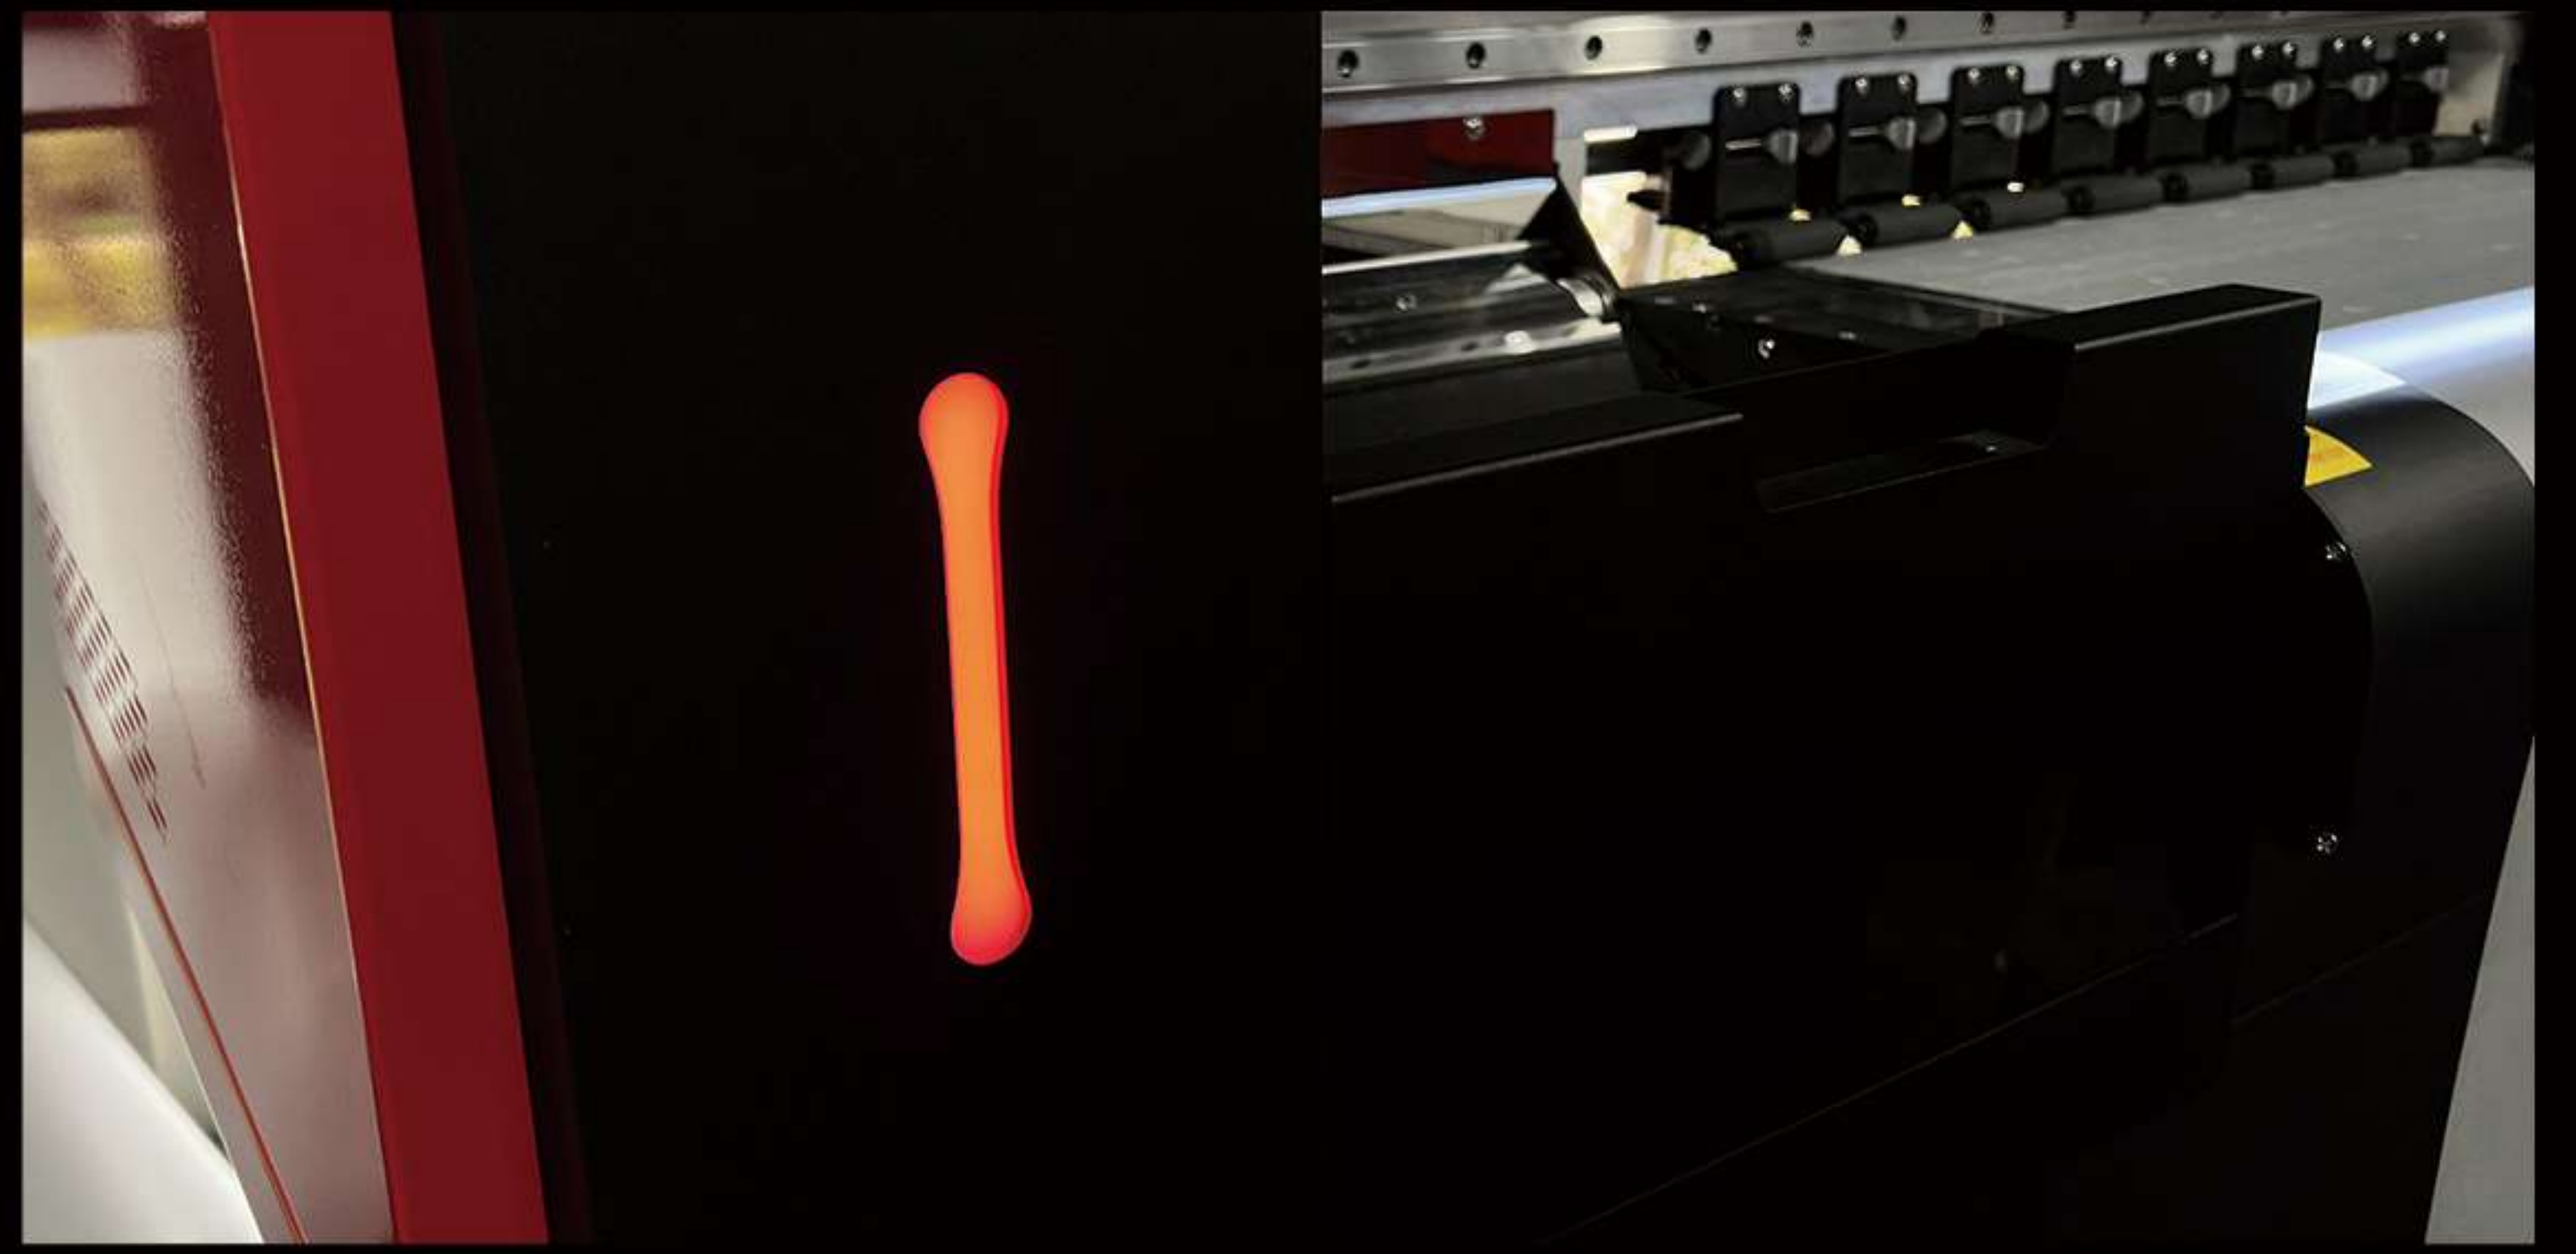

Waste Ink Storage System

The user-friendly design makes it easier to collect waste ink and discharge waste, simplifying the process of daily maintenance of the machine.

Security Protection System

When the machine encounters an obstacle during printing, the nozzle will stop working immediately. The machine will light up with a red light to remind you of the unsafe status.

SUPER A-600 DTF PRINTER

Printer head	2 EPSON i3200
Print speed	4pass(360*2400dpi):16m ² /h 6pass(360*3600dpi):11m ² /h 8pass(720*2400dpi):8m ² /h
Maximun printing width	600mm
Ink type	DTF pigment ink
Heating sections	Pre-heater; Rear heater
RIP software	Photoprint/Maintop/CADlink
Language	English
Working environment	Temperature: 20-35°C, Humidity:35%-65%
Functional item	Shake powder control/Powder amount control/ Temperature control
Voltage	AC110V / 220V 50HZ/60HZ
Power	Printer power 2.8kw (generally operates at 800W)
Packing size	L1900*W933*H1332MM Gross weight: 320kg
Printer size	L1827*W795*H1315MM

EVO-B600 POWDER SHAKER

Max width	600mm	Oven length	1079mm
Heat temperature	0-400°C		
Voltage	110v/220v, 60HZ		
Power	4.6KW		
Size/Weight	1850mm(L)*1150mm(W)*1050mm(H) 320kg		

Product Applications

